




## Rig Up Dolly

The **Rig Up Dolly** is designed to be attached to the bottom of the lubricator providing a roller system to assist the movement of the lubricator when rigging up / down pressure control equipment.

The Rig Up Dolly is simply threaded onto the lower union, so that it is unable to come off during the rig-up process. It has a steel axle and two or four heavy-duty wheels that support the weight of the lubricator whilst it is being brought into position, irrespective of the lift angle.

There is an easy structure Dolly for large bore Lubricators to reduce the Quick Union connect and disconnect. Put the connected Lubricators in a tubbiness Dolly, and fix it with jackscrew. It is as safety and reliable as Quick Union Rig Up Dolly.

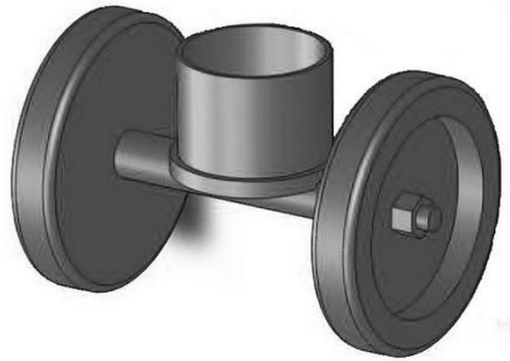

### Features

- 1) Safely moves lubricators
- 2) Proper type options to suit different terrain environments
- 3) Reduces potential damage to lower Quick Union
- 4) Two structures for selective



*Subject to change without notice*