



Dimple Connector

Dimple Connector allows the attachment of coiled tubing to the CT toolstring via the provision of a threaded connection. The connector is attached to the coiled tubing by grub screws that engage in preformed dimples in the tubing wall. The dimples are formed by using Dimple Applicator that places the indents in identical positions to the screws on the connector.

The Dimple Applicator is a special tool used to accurately produce the indentations in the coiled tubing wall by screwing the round headed cap screws into the Dimple Applicator.




Features

- 1) High tension strength
- 2) Dual O-ring internal pressure seal
- 3) Easy makeup

Dimple Connector			
CT Size	Max. O.D.	Min. I.D.	Connection
1-1/4"	1.750"	0.75"	1" AMMT
1-1/2"	2.125"	0.75"	1" AMMT
1-1/2"	2.875"	1.125"	1-1/2" AMMT
1-3/4"	2.875"	1.00"	1-1/2" AMMT
1-3/4"	3.125"	1.125"	2-3/8" PAC
2"	3.375"	1.50"	2-3/8" PAC
2-3/8"	3.375"	1.125"	2-3/8" PAC

- 1) Other sizes available on request.
- 2) AMMT, PAC and other thread connection for selective.
- 3) STD and H₂S service environment for selective. Quote with STD service if no specify.

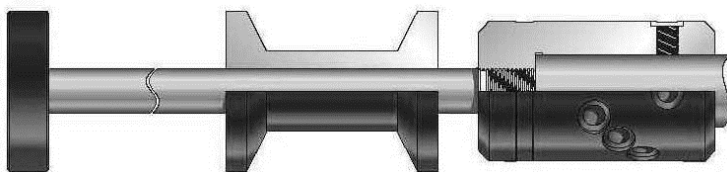

Dimple Applicator

Subject to change without notice