



Two Door Stripper Packer


The **Two Door Stripper Packer** is one kind of Side Door Stripper Packer which has two side doors. It could install two Packer Rubbers to improving the sealing and safety in operation. It is main applied in high working pressure 15000Psi. Some 10000Psi working pressure environment could apply with Two Door Stripper Packer for improving the operation safety too.

The Two Door Stripper Packer is designed to pack-off around the coiled tubing that is being lowered into or pulled out of the well bore. It can also be used to seal around the coiled tubing in emergency operations. The Two Door Stripper Packer is installed between the coiled tubing BOP and the Injection Head.

The Two Door Stripper could allow replace the Packer Rubber and Bushing from the side door though the tubing in the well too.

Feature

- 1) Safety and easy maintenance.
- 2) Two Packer Rubbers for more reliable sealing and safety.
- 3) Allow replace Packer Rubber and Bushing in operation.
- 4) Bottom Quick Union and Flange connection for selective.

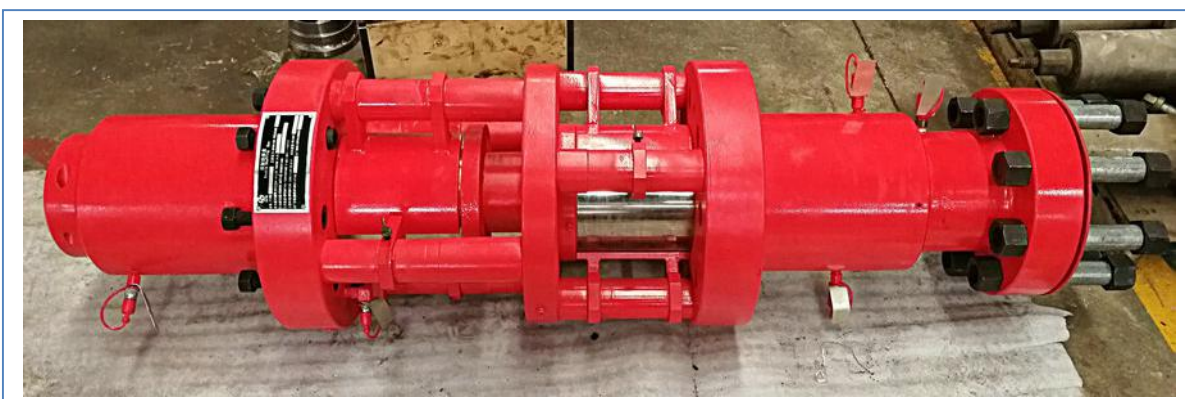



Main Parameter

- 1) Working Pressure
- 2) Coiled tubing Size you applied
- 3) Upper and Lower Connection required
- 4) Service Environment (STD or H2S)
- 5) Working Temperature

15000psi Two Door Stripper Packer						
Model	Working Pressure	CT Size	Qty. Of Packing Rubber	Bottom Connection	Service	Working Temperature
2FPH7-105	15000Psi	1"~2-7/8"	2	CO36 or API 3 1/16"-15K (BX154) Open Flange	STD or H2S	P + U
2FPH10-105	15000Psi		2	CO46 or API 4 1/16"-15K (BX155) Open Flange		-20°F~+250°F (-29°C~+121°C)
2FPH13-105	15000Psi		2	CO56 or API 5 1/8"-15K (BX169) Open Flange		Or As Required

Note

- 1) Additional size available on request.
- 2) There are Bowen (Type B), Otis (Type O) for Quick Union selective.

Normal Guarantee Period

12 months after the clients received the Equipment
 or 13 months after the commodity be shipped from Chinese Harbor.

Information Required When Inquiry

If you will purchase the whole Coiled Tubing PCE,
 please refer to the [Information Required When Inquiry](#) in Chapter 《Coiled Tubing PCE》 .
 If you purchase the Two Door Stripper Packer separately,
 the **Main Parameter** information above mentioned will be asked.

Subject to change without notice