




## Swivel Joint

**Swivel Joint** is a wireline accessory used to minimize the effect of line twist caused by subsurface devices being run. The Swivel Joint has a bearing incorporated into its design and is used to minimize rotation whilst running tubing or casing calliper surveys. The Swivel Joint has a double fishneck feature and standard pin and box threads.

Swivel Joints			
Size (in.)	Actual. OD (in.)	F/N OD (in.)	Connection (in. TPI)
1-1/2	1.500	1.375	15/16-10 UN
1-7/8	1.875	1.750	1-1/16-10 UN
2-1/8	2.125	1.750	1-1/16-10 UN
2-1/2	2.500	2.313	1-9/16-10 UN

Other sizes available on request.

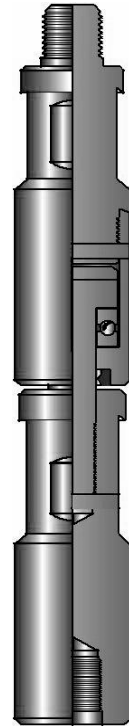

Knuckle Joint

Note: Please specify information below when inquiry

1) Tool Size

2) Connection type

Subject to change without notice