



Adapter Flange

Adapter Flange provides a direct connection between surface pressure equipment and the wellhead. They are available in any combination of threaded Union and Flange connection.

Normally, the Adapter Flange of Coiled Tubing PCE consists of a Union or a Flange machined on a standard API Flange. If you purchase a set of Coiled Tubing PCE, we will provide the fitted Adaptor Flange according to configuration. If you only purchase Adaptor Flange, the exact requirement will be asked.



Feature

- 1) Design and manufacturing comply with API Sepc-6A, it will be applied to all API standard models.
- 2) One piece forging of the Flange Body, without welding.
- 3) The pressure-containing parts are made of high strength alloy steel with good corrosion resistance.
- 4) **Accessories such as Thread Protector, Bolts, Nuts and Gasket Ring all be provided for convenient use.**






Main Parameter

- 1) I.D.
- 2) Working Pressure
- 3) Upper and Lower connection Required
- 4) Service Environment (STD or H2S)
- 5) Working Temperature

More Adapter Flange

There are more type Adapter Flange provided available on request.

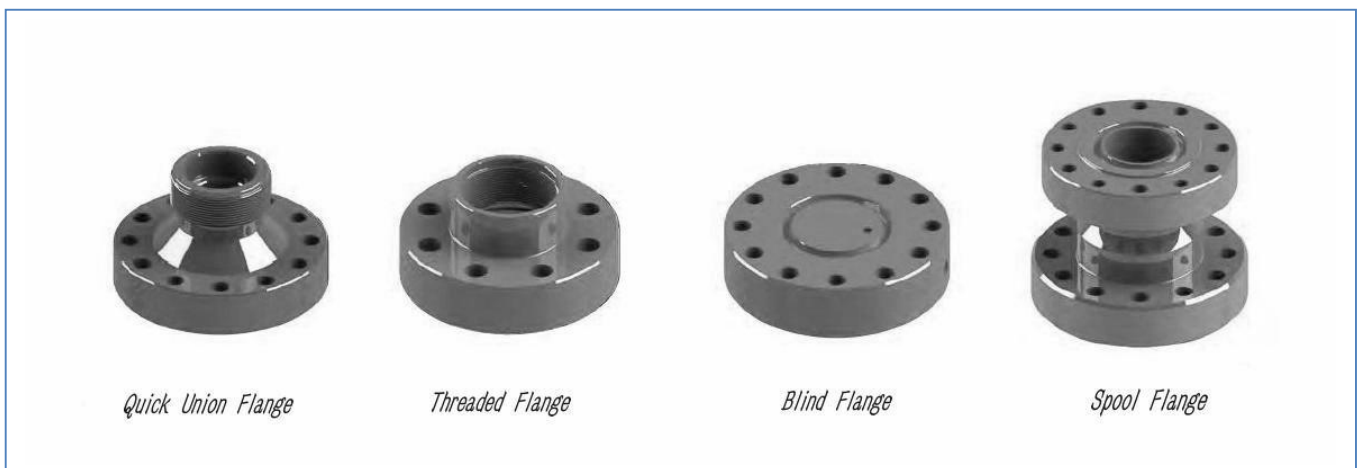

Normal Guarantee Period

12 months after the clients received the Equipment
or 13 months after the commodity be shipped from Chinese Harbor.

Information Required When Inquiry

If you will purchase the whole Coiled Tubing PCE,
please refer to the [Information Required When Inquiry](#) in Chapter 《Coiled Tubing PCE》 .

If you purchase the Adapter Flange separately, the Main Parameter information above mentioned will be asked.

Subject to change without notice