




Tubing End Locator

Tubing End Locators are used to locate end of tubing during completions.

The Tubing End Locator consists of a slotted body in which a spring loaded trigger is retained by a pivot pin. A shear pin limits the outward travel or rotation of the trigger so that, when the tool emerges from the lower end of the tubing, the trigger will swing to a maximum reach position approximately perpendicular to the body and will not be allowed to re-enter the tubing until the shear pin is cut.

Tubing End Locators			
Body OD (in.)	Tubing Range (in.)	F/N OD (in.)	Connection (in. TPI)
1.500	2-3/8"~2-7/8"	1.375	15/16-10 UN
1.875	2-7/8"~3-1/2"	1.750	15/16-10 UN
2.000	2-7/8"~3-1/2"	1.750	1-1/16-10 UN
2.500	3-1/2"~4-1/2"	2.313	1-1/16-10 UN
3.500	5"~7"	2.313	1-9/16-10 UN

Other sizes available on request.

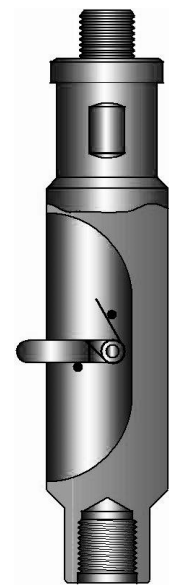

Tubing End Locator

Note: Please specify information below when inquiry

1) Tool body OD and applied tubing

2) Connection type

Subject to change without notice