




Wireline Set Drillable Bridge Plug

Wireline Set Drillable Bridge Plugs (DBP) are compact, small OD and designed for easy drill out. These Drillable Bridge Plugs will set securely in all but the very highest tensile casing. A ratchet lock ring stores the setting force in the plug. The one piece packing element and metal back up rings combine for a superior seal. The case hardened, one piece slips virtually eliminate premature setting, yet can be easily drilled out. They are available for 2 3/8" through 20" casing.

Features

- 1) Can be set directly with Baker Wireline Setting Tools
- 2) Easy for mill out
- 3) Sets securely in most hardness casing
- 4) Shear studs are Baker style and connect directly to the Baker Adjuster Sub
- 5) Ratchet lock rings secure dynamic setting force
- 6) One piece packing element and rocker action metal back up rings combine for a superior seal

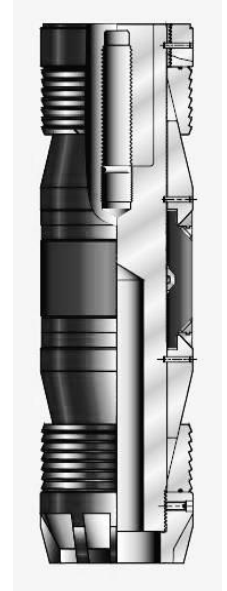

Wireline Set Drillable Bridge Plug							
Casing OD	Casing Wt.	Setting Range		Tool OD	Release Force	Setting Tool	Setting Adaptor Kit
		Min(in)	Max(in)				
(in)	(lbs/ft)			(in)	(lbs)	/	/
2 3/8	4.0-5.8	1.78	2.074	1.75	9000	# 5	/
2 7/8	6.4-6.5	2.34	2.525	2.22			/
3 1/2	5.7-10.3	2.867	3.258	2.75			Required
3 1/2	12.8-15.8	2.548	2.764	2.43	13000	# 10	/
4	5.6-14	3.34	3.732	3.14	20000		Required
4 1/2	9.5-16.6	3.826	4.09	3.59	33000	# 10	Required
5	11.5-20.8	4.154	4.56	3.93			Required
5 1/2	13-23	4.58	5.044	4.31			Required
5 3/4	14-25.2	4.89	5.29	4.7	50000	# 20	Required
6 5/8	17-32	5.595	6.135	5.37			Required
7	23-35	5.938	6.336	5.68			Required
7	17-23	6.336	6.538	6.00			Required
7 5/8	20-39	6.625	7.125	6.31			Required
8 5/8	24-49	7.31	8.097	7.12			Required
9 5/8	29.3-58.5	8.435	9.063	8.12			Required
10 3/4	32.7-60.7	9.66	10.192	9.43			Required
11 3/4	38-60	10.772	11.15	10.43			Required
11 3/4	60-83	10.192	10.772	9.94			Required
13 3/8	48-84.5	12.175	12.715	11.88	Required		
16	65-118	14.576	15.25	14.12	Required		
20	94-133	18.73	19.124	18.37	Required		