




## GS Pulling Tool

**GS Pulling Tool** are used to unlock and pull various down hole equipment with Internal Fishing Necks. These tools are designed to shear with Jar Down action. With addition of GU Adapter, complete assembly is changed to GR Shear Up Tool.

| GS Pulling Tools |            |        |              |                    |
|------------------|------------|--------|--------------|--------------------|
| Size             | Actual. OD | F/N OD | Connection   | Engaging Neck I.D. |
| (in.)            | (in.)      | (in.)  | (in. TPI)    | (in.)              |
| 1-1/4            | 1.17       | 1      | 5/8-11 UN    | 0.88               |
| 1-1/2            | 1.47       | 1.187  | 15/16-10 UN  | 1.06               |
| 2                | 1.81       | 1.375  | 15/16-10 UN  | 1.38               |
| 2-1/2            | 2.25       | 1.750  | 15/16-10 UN  | 1.81               |
| 3                | 2.72       | 2.313  | 1-1/16-10 UN | 2.31               |
| 3-1/2            | 3.11       | 2.313  | 1-1/16-10 UN | 2.62               |
| 4                | 3.62       | 2.313  | 1-1/16-10 UN | 3.12               |
| 5                | 4.50       | 3.125  | 1-1/16-10 UN | 4.00               |
| 6                | 5.56       | 3.125  | 1-1/16-10 UN | 4.75               |

Other sizes available on request.

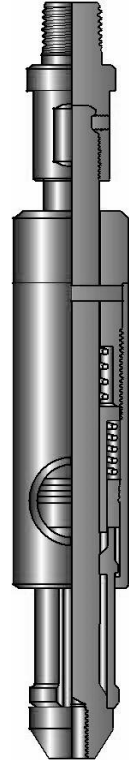

GS Pulling Tool

Note: Please specify information below when inquiry

1) Tool Size

2) Connection type

Subject to change without notice